


B.2 Single handle lavatory faucet "M" & # B21020002U10

|< 6 1/2" Inch >|



Single handle lavatory faucet "M"	Dimension	Weight	Order number
ceramic cartridge, projection 5 1/2", stainless steel flexible connection hoses 3/8" OD compression, aerator adjustable, normal spray, Chrome finish, max. temperature can be adjusted during installation, recommended operating pressure 43.5 - 72.5 psi, less pop-up and drain assembly, 6 1/2" Inch			
Colors			
10 Chrome			
Variant			
1.1 gal/min (4.2 l/min) flow rate 43.5 psi (3.0 bar), cCSAus listed*			B21020002U10

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.

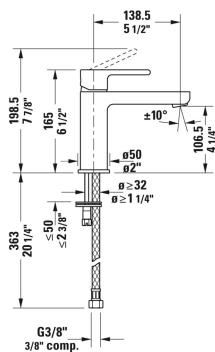

B.2 Single handle lavatory faucet "M" & # B21020001U10

|< 6 1/2" Inch >|



Single handle lavatory faucet "M"	Dimension	Weight	Order number
ceramic cartridge, projection 5 1/2", stainless steel flexible connection hoses 3/8" OD compression, aerator adjustable, normal spray, Chrome finish, max. temperature can be adjusted during installation, recommended operating pressure 43.5 - 72.5 psi, with pop-up and drain assembly, 6 1/2" Inch			
Colors			
10 Chrome			
VARIANT			
1.1 gal/min (4.2 l/min) flow rate 43.5 psi (3.0 bar), cCSAus listed*			B21020001U10

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.

