


**PODURAVIT** 

Vero Air Toilet wall-mounted Duravit Rimless®  $\updelta$  # 252509..92 / 252509..92

|< 14 5/8" Inch >|

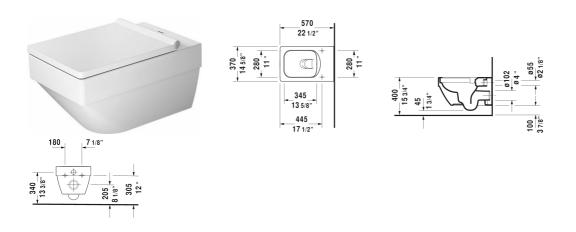

Toilet wall-mounted Duravit Rimless®	Dimension	Weight	Order number
rimless, washdown model, Durafix included, cUPC® listed* WaterSense® listed	t !		
Colors			
00 White 20 HygieneGlaze (an antibacterial ceramic glaze t provides almost indefinite effectiveness)	that		
Variant			
<b>1.6/0.8</b> gpf	14 5/8" x 22 1/2" Inch	55.8 lb	25250992
<b>♦</b> 1.6/0.8 gpf	14 5/8" x 22 1/2" Inch	55.8 lb	25250992
Infobox			
$^{st}$ Complies with following standards: ASME A112.19.2/CSA installation is included, Wall-mounted toilet is ADA compliathe finished floor, In-wall tank & carrier and actuator plate			
Sanitary ceramics with the special WonderGliss surface finish will remain clean and attractive-looking for a long time to come.  When ordering WonderGliss please add a "1" as eleventh digit to the model number.			
Noise reduction gasket for wall-mounted toilet		0.7 lb	005064
Actuator plate A1, for toilet, plastic mechanical actuation, f surface mounted installation, dual flush, mounting frame, mounting hardware included, push rods, front plate plastic	8 1/2" x 5 3/4" Inch	0.7 lb	WD5008



## Vero Air Toilet wall-mounted Duravit Rimless® $\mbox{$\dot{a}$} \ \ \# \ 252509..92 \ / \ 252509..92$

|< 14 5/8" Inch >|

Toilet in-wall tank & carrier, Standard WaterSense® listed, For 2"x4" and 2"x6" wall installation, for toilets with a projection of <= 24 5/8", adjustable feet 0" - 9 1/2", SensoWash ready, mechanical front flush actuation, includes in-wall tank, marking of filling height, dual flush, insulated against condensation, Scope of delivery, HDPE wall-mounted toilet connection bend DN 90/90, PE wall-mounted toilet connection set DN 90, wall-mounted mounting rods M12, mounting hardware included, 2 bolt caps, cUPC® listed*, Load capacity = 880 lbs	WD1022
Suitable products	
Toilet seat and cover removable, hinges stainless steel, with slow close,	002209
Toilet seat and cover removable, hinges stainless steel, without slow close,	002201

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.