



#### **Product Description:**

ALLURE

Pressure Balance Valve Trim

#### Standard Specification:

- Final installation set for:
- For use with Grohsafe Rough-In Valve (35 016 000)
- GROHE StarLight chrome finish
- Automatic diverter: bath/shower
- Metal escutcheon
- Metal lever handle
- Escutcheon and shaft sealings
- Covered attachment

#### Applicable Codes & Standards:

- Energy Policy Act of 1992
- ASME A112.18.1/CSA B125.1

#### Color:

□ 19376000 StarLight Chrome

# RAINSHOWER™ SMARTACTIVE

# 24" SHOWER SLIDE BAR KIT - 3 SPRAYS, 1.75 GPM



#### STANDARD SPECIFICATION:

- GROHE StarLight®
- GROHE DreamSpray® perfect spray pattern
- GROHE EcoJoy
- GROHE EasyReach tray
- GROHE QuickFix® Plus adjustable distance between brackets for easy alignment with existing drilling holes
- GROHE TileFix adjustable depth on upper and lower brackets to accommodate uneven surfaces24" Rail
- Speed Clean® anti-lime system
- Rainshower<sup>™</sup> SmartActive Hand Shower (26 552)
- 5" (130mm) Square face
- 3 Sprays: Rain, Jet, ActiveMassage
- 24" (600mm) Shower Bar (26 602)
- Rotaflex metal shower hose 69" (1750mm)
- Inner WaterGuide for longer life
- Twistfree to prevent hose from twisting
- 1.75 gpm (6.6I/min)



#### **PRODUCT FEATURES:**

- GROHE StarLight®
- GROHE DreamSpray®
- GROHE EcoJoy™
- Speed Clean®
- GROHE QuickFix®

#### **CERTIFICATIONS:**



- WaterSense
- CEC Certified
- Cal Green Compliant
- Massachusetts Plumbing Board Approved
- Energy Policy Act of 1992
- CSA B125.1
- ASME A112.18.1

#### **AVAILABLE FINISHES:**

26585000



26585EN0



NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.



# RAINSHOWER™ SMARTACTIVE





# 24" SHOWER SLIDE BAR KIT - 3 SPRAYS, 1.75 GPM


#### **TECHNICAL DATA:**

Product Height 24-13/16 in

Product Length 5-1/2 in

Product Width 5-1/8 in

GPM (Min)-GPM (Max) 1.75 gal (US)/min

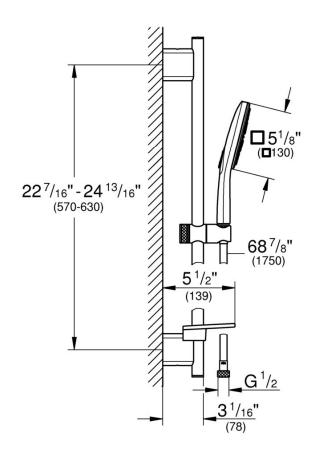





### **RAINSHOWER ALLURE 230** Shower Head 1 Spray MODEL # 27480000













#### **Product Description: RAINSHOWER ALLURE 230** Shower Head 1 Spray

#### Standard Specification:


- Rain spray pattern (1 spray-rain)
- 230 x 230 mm
- Metal
- Ball joint with turning angle ± 15°
- 1/2" Connection thread
- 2.5 gpm (9.5 l/min) flow limiter
- GROHE DreamSpray perfect spray pattern
- GROHE StarLight chrome finish
- SpeedClean anti-lime system
- Suitable for instantaneous heater
- Max Flow Rate 2.5 gpm at 80 psi (9.5 L/min)
- Min. recommended pressure: 15 psi (1.0 bar)

#### Applicable Codes & Standards:

- Energy Policy Act of 1992
- ASME A112.18.1/CSA B125.1

#### Color:

□ 27480000 StarLight Chrome

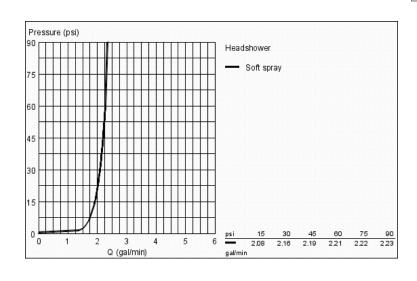

# 28 577 **RAINSHOWER**™

# 11 1/4" SHOWER ARM



#### STANDARD SPECIFICATION:

- GROHE StarLight®
- 11 1/4" Shower Arm
- 1/2" NPT male threads
- Can be used with any shower head EXCEPT Rainshower™ Jumbo (28 783)



#### **PRODUCT FEATURES:**



#### **CERTIFICATIONS:**

- CSA B125.1
- ASME A112.18.1

#### **AVAILABLE FINISHES:**

28577000



28577EN0



NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.



# 28 577 **RAINSHOWER**™ 11 1/4" SHOWER ARM




#### **TECHNICAL DATA:**

Product Height 3-3/8 in

Product Length 11-1/4 in

Product Width 2-9/16 in










Product Description: RAINSHOWER Shower outlet elbow, 1/2"

#### Standard Specification:

- Female thread
- With square escutcheon
- Protected against backflow
- GROHE StarLight chrome finish

#### Color:


□ 26184000 StarLight Chrome













#### Product Description:

GROHSAFE

Pressure Balance Rough-In Valve with Built-In Mechanical Diverter

#### Standard Specification:

- With built-in diverter
- Handle limit stop
- Diaphragm cartridge
- Check valves
- Built-in diverter
- Service stops
- Universal connection is 1/2" male by copper sweat
- Max Flow Rate 5.8 gpm at 45 psi (22 L/min)

#### Applicable Codes & Standards:

- Energy Policy Act of 1992
- ASME A112.18.1/CSA B125.1

#### Color:

□ 35016000

# **RAINSHOWER™ COSMOPOLITAN**





# 210 SHOWER HEAD, 8" - 1 SPRAY

#### STANDARD SPECIFICATION:

- GROHE StarLight®
- GROHE DropStop
- GROHE DreamSpray®
- Speed Clean® anti-lime system
- 8" Face
- 1 Spray: GROHE PureRain
- Metal shower head
- 120 Spray nozzles
- 1/2" NPT Female threads
- Rotation angle ± 15°
- Recommended Rainshower™ arm: (28 577) or (28 492) or (27 217) (sold separately)
- Max. flow rate: 2.5gpm (9.5L/min)



#### **PRODUCT FEATURES:**



GROHE StarLight®



GROHE DreamSpray®



Speed Clean®

#### **CERTIFICATIONS:**

- Massachusetts Plumbing Board Approved
- Energy Policy Act of 1992
- CSA B125.1
- ASME A112.18.1

#### **AVAILABLE FINISHES:**

28373000



28373EN0



NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.



# **RAINSHOWER™** COSMOPOLITAN



210 SHOWER HEAD, 8" - 1 SPRAY

#### **TECHNICAL DATA:**

Product Height 1-5/8 in

Product Length 8-1/4 in

Product Width 8-1/4 in

GPM (Min)-GPM (Max) 2.5 gal (US)/min

