
Shower Channel - Mix Grate

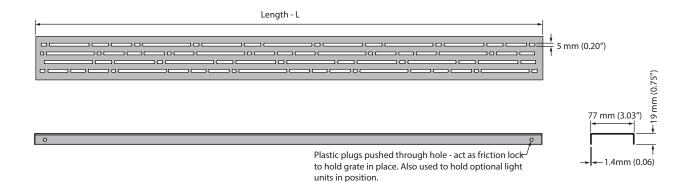

Product Table

Length mm (in)	700 (27.55)	800 (31.50)	900 (35.43)	1000 (39.37)	1200 (47.24)	1400 (55.12)	Replacement grate lifting key
Width	77	77	77	77	77	77	n/a
mm (in)	(3.03)	(3.03)	(3.03)	(3.03)	(3.03)	(3.03)	
Part No. Electro- polished	37403	37404	37405	37406	37407	37415	37339
Part No. Oil-rubbed bronze	37301	37326	37340	37319	37329	37294	37339
Weight	0.77	0.86	0.95	1.08	1.31	1.54	0.04
kg (lbs)	(1.7)	(1.9)	(2.1)	(2.4)	(2.9)	(3.4)	(0.1)
Intake area	119.6	134.7	151.9	170.7	178.7	186.7	n/a
sq. cm (sq. in)	(18.54)	(20.88)	(23.56)	(26.47)	(27.71)	(28.95)	

Specification Clause

The QuARTz ACO ShowerDrain channel and Mix grate system shall be 1mm thick (20 gage) stainless steel grade 304 manufactured by ACO, Inc. USA.

The surface finish shall be Electropolished* OR Oil Rubbed Bronze*.

Grate shall be 77 mm (3.03") wide, with length as specified on Architects plans / Architects specification.

Shower channel shall be Plain Edge* OR Flanged Edge*. (See separate Spec Info Sheet for details)

ACO recommends checking local plumbing codes prior to installation.

The system shall be installed in accordance with the manufacturer's instructions and recommendations.

ACO Systems, Ltd. 1-2880 Brighton Rd. Oakville, ON L6H 5S3 Tel: (905) 829-0665 Fax: (905) 829-2908


Electronic Contact: Eml: info@acocan.ca Web: www.acoshowerdrain.ca





Shower Channel - Plain edge

For CPE membranes

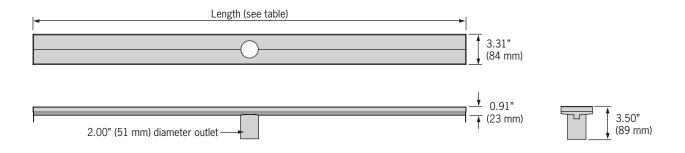

Product Table

Length (mm) inches	700 27.55	800 31.50	900 35.43	1000 39.37	1200 47.24	1400 55.12	PVC membrane coupling	Cast iron membrane coupling
Width (mm) inches	84 3.31	84 3.31	84 3.31	84 3.31	84 3.31	84 3.31	n/a	n/a
Part No. Electro-polished	93861	93864	93865	93869	93872	93816	93871	93822
Part No. Oil-rubbed bronze	93180	93187	93184	93189	93182	93177	93871	93822
Weight lbs	2.5	2.6	3.0	3.2	3.7	4.2	1.1	4.7

Specification Clause

The QuARTz ACO ShowerDrain channel and grate system shall be stainless steel grade 304 manufactured by ACO Polymer Products, Inc. USA. The surface finish shall be Electropolished* OR Oil Rubbed Bronze*. Grate shall be Flag*/Hawaii*/Mix*/Pixel*/Quadrato*/Wave*/Tile*.

Shower channels shall be 3.31" (84mm) wide, with length as specified on Architects plans / Architects specification. Outlet spigot (0.D.) diameter shall be 50mm (2.0").

The PVC or cast iron membrane coupling [to provide connection to S/S spigot of shower channel and plumbing pipe system] shall be supplied by ACO Polymer Products Inc. This PVC or cast iron drain body will provide clamping ability for waterproof membrane. (supplied by others)

ACO recommends checking local plumbing codes prior to installation.

The system shall be installed in accordance with the manufacturer's instructions and recommendations.

*Delete as necessary

ACO Polymer Products, Inc.

West Sales Office 825 W. Beechcraft St. Casa Grande, AZ 85122 Tel: (520) 421-9988 Toll Free: (888) 490-9552 Fax: (520) 421-9899 East Sales Office 9470 Pinecone Dr. Mentor, OH 44060 Tel: (440) 639-7230 Toll free: (800) 543-4764 Fax: (440) 639-7235

Southeast Sales Office 4211 Pleasant Rd Ft. Mill, SC 29708 Tel: (800) 543-4764 Toll Free: (800) 662-2377 Fax: (803) 802-1063 Follow us on

Flectronic Contact:
info@QuARTzbyACO.com
www.QuARTzbyACO.com

