


ø102 ø4"

## Qatego Toilet wall-mounted Duravit Rimless® & # 2556092000

## |< 15" Inch >|

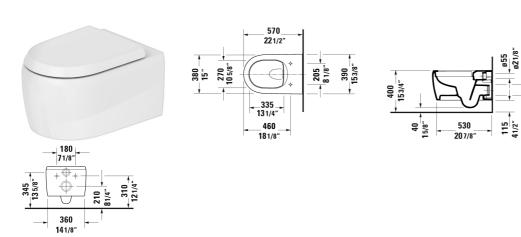

Toilet wall-mounted Duravit Rimless®	Dimension	Weight	Order number
rimless, WaterSense® listed, washdown model, Durafix included, incl. pre-mounted stainless steel hinges, cUPC® listed*			
Colors			
20 HygieneGlaze (an antibacterial ceramic glaze that provide almost indefinite effectiveness)	es		
Variant			
•	15" x 22 1/2" Inch	63.9 lb	2556092000
Infobox			
Wall-mounted toilet is ADA compliant, when installed with a tank & carrier and actuator plate required for installation, * A112.19.2/CSA B45.1 and ASME A112.19.14, Durafix for cond	Complies with following st	andards: ASME	r, In-wall
Actuator plate A1, for toilet, plastic mechanical actuation, fo surface mounted installation, dual flush, mounting frame, mounting hardware included, push rods, front plate plastic	r 8 1/2" x 5 3/4" Inch	0.7 lb	WD5008
Toilet in-wall tank & carrier, Standard WaterSense® listed, 2"x4" and 2"x6" wall installation, for toilets with a projection <= 24 5/8", adjustable feet 0" - 9 1/2", SensoWash ready, mechanical front flush actuation, includes in-wall tank, mar of filling height, dual flush, insulated against condensation, Scope of delivery, HDPE wall-mounted toilet connection ben DN 90/90, PE wall-mounted toilet connection set DN 90, wa mounted mounting rods M12, mounting hardware included, bolt caps, cUPC® listed*, Load capacity = 880 lbs	n of king 23 1/4" x 45 1/4" Incł d III-	n 35.3 lb	WD1022
Noise reduction gasket			Schallschutz-Set 005090



## **Qatego Toilet wall-mounted Duravit Rimless**® & # 2556092000

|< 15" Inch >|

Suitable products	
Toilet seat and cover hinges stainless steel, with slow close,	002689

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are nonbinding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.