

Features

- Fixture-mount design
- Includes a 30-year hybrid energy cell

Material

- Brass

Technology

- Electronic infrared sensor with Tripoint® technology for accurate activation
- Slow-closing piston technology

Installation

- Intended for toilet installations with 1-1/2" spud coupling connection

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

GP1118986 Flushometer Extension Kit
K-10313 Flushometer 12" rough-in kit
1132369 Sleeve



ADA

CSA B651

OBC


Codes/Standards

ASME A112.18.1/CSA B125.1
CSA B125.3
CSA B64
ASSE 1037/ASME A112.1037/CSA B125.37
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

*10-3/4" (273 mm) minimum with a
6" (152 mm) critical level above the fixture

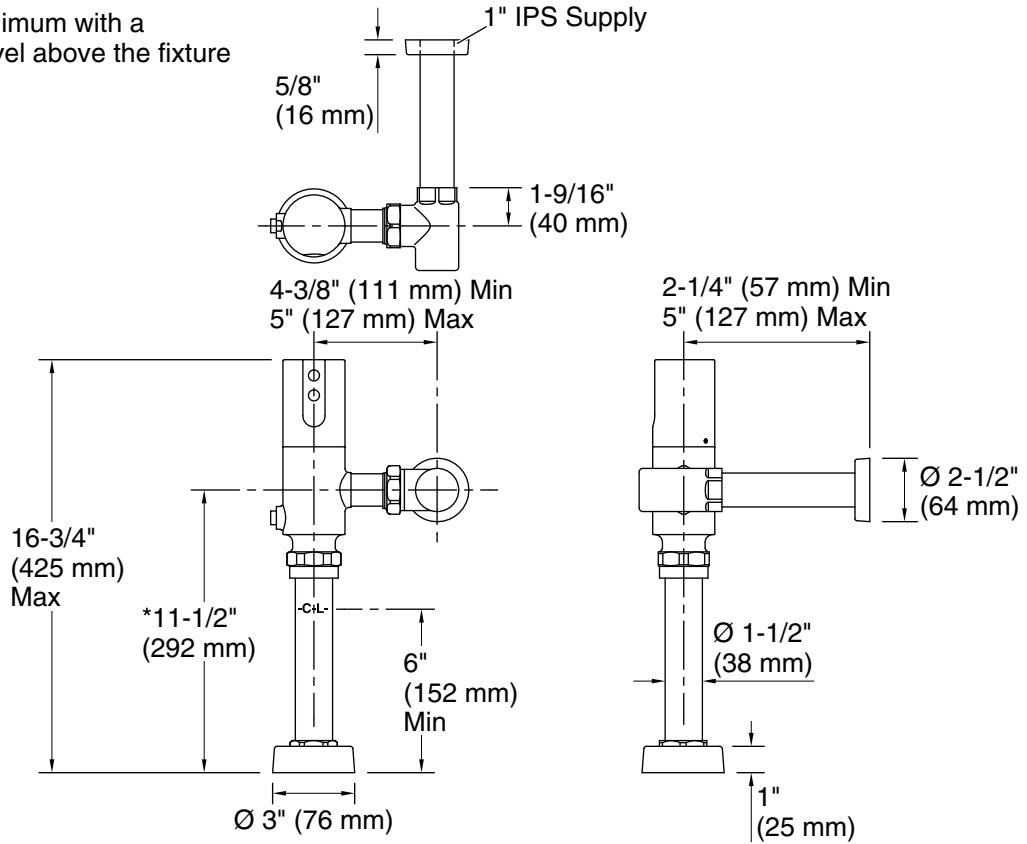

Technical Information

All product dimensions are nominal.

Power source: Hybrid Energy Cell, included

Pressure/fixture Supply Requirements

Fixture pressure 80 psi (551.6 kPa)

max (static):

Min flowing 25 psi (172.4 kPa)

pressure:

Min flow rate: 25 gpm (94.6 lpm)

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

For ADA installations, rear grab bar may need to be split or shifted.