


10" - 16" (254 mm - 406mm) Centers (Flexible) (229 mm) 11 13/16" (285 mm) 6 1/2 (165 mm) 2 3/4" (70 mm)→ 2 1/2" 1 5/8" (64 mm) (41 mm) Max Deck Thickness 3 11/16" (94 mm) 7 7/8" (200 mm) 3 1/16' (78 mm) 60" - 82" (1524 mm - 2083 mm) Handshower Hose

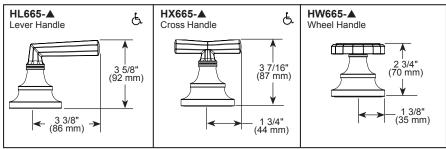

▲ Designate proper finish suffix

BRIZO

ROMAN TUB TRIM

- Beauclere[™] Bath Collection
- Four Hole Installation

FEATURES:

- H2Okinetic[®] Technology
- No handle set screw required, simplifies installation

STANDARD SPECIFICATIONS:

- Hand shower max. flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Trim only for two handle Roman Tub faucet for concealed mounting
- Temperature and volume controlled with handles
- Rough-In kit required to complete installation, sold separately (R64707). There are separate specification sheets available for each rough-in kit.
- Hand shower includes double check valves for backflow prevention
- 60" 82" (1524 mm 2083 mm) stretchable finished metal hose

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®
- L ICC/ANSI A117.1 Valve control only