

## Ultramax® One-Piece Toilet - 1.6 GPF

### FEATURES

---

- TORNADO FLUSH® system - 1.6 GPF (6.0 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Decorative one-piece design with high-profile tank
- UNIVERSAL HEIGHT
- Elongated front bowl with SoftClose® seat (SS114)
- 12" Rough-in
- Chrome plated trip lever

### MODELS

---

- **MS608114CSFG (#01)**  
With CEFIONTECT ceramic glaze & includes SS114 SoftClose seat

### OPTIONAL COMPONENTS

---

- **THU808(#01, #12, #51, #BN, #PN, #PB, #RB, #MBL)-A**  
Trip Lever (Cotton, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Polished Brass, Oil Rubbed Bronze, Matte Black)

### COLORS/FINISHES

---

- #01 Cotton

### PRODUCT SPECIFICATION

---

The one-piece TORNADO FLUSH system toilet shall be 1.6 GPF/6.0 LPF. Toilet shall be 12" rough-in. Toilet shall have optional CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Chrome trip lever. Toilet shall be TOTO Model MS608114CSFG#\_\_.



TORNADO FLUSH



CEFIONTECT



UNIVERSAL HEIGHT

### CODES/STANDARDS

---

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®)
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



# MS608114CSFG

## Ultramax® One-Piece Toilet - 1.6 GPF


### SPECIFICATIONS

<b>Water Use</b>	1.6 GPF (6.0 LPF)
<b>Flush System</b>	TORNADO FLUSH®
<b>Min. Water Pressure</b>	8 psi (Flowing)
<b>Water Surface</b>	9" x 7"
<b>Trap Diameter</b>	2"
<b>Rough-in</b>	12"
<b>Trap Seal</b>	2-1/8"
<b>Warranty</b>	One Year Limited Warranty
<b>Material</b>	Vitreous China
<b>Shipping Weight</b>	99 lbs
<b>Shipping Dimensions</b>	29-3/4" L x 18-1/8" W x 28-3/4" H1 x 20-1/2" H2

### INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

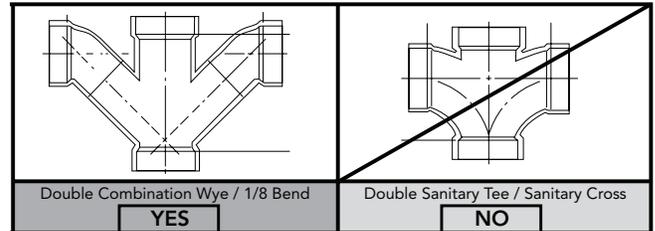

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

### DIMENSIONS

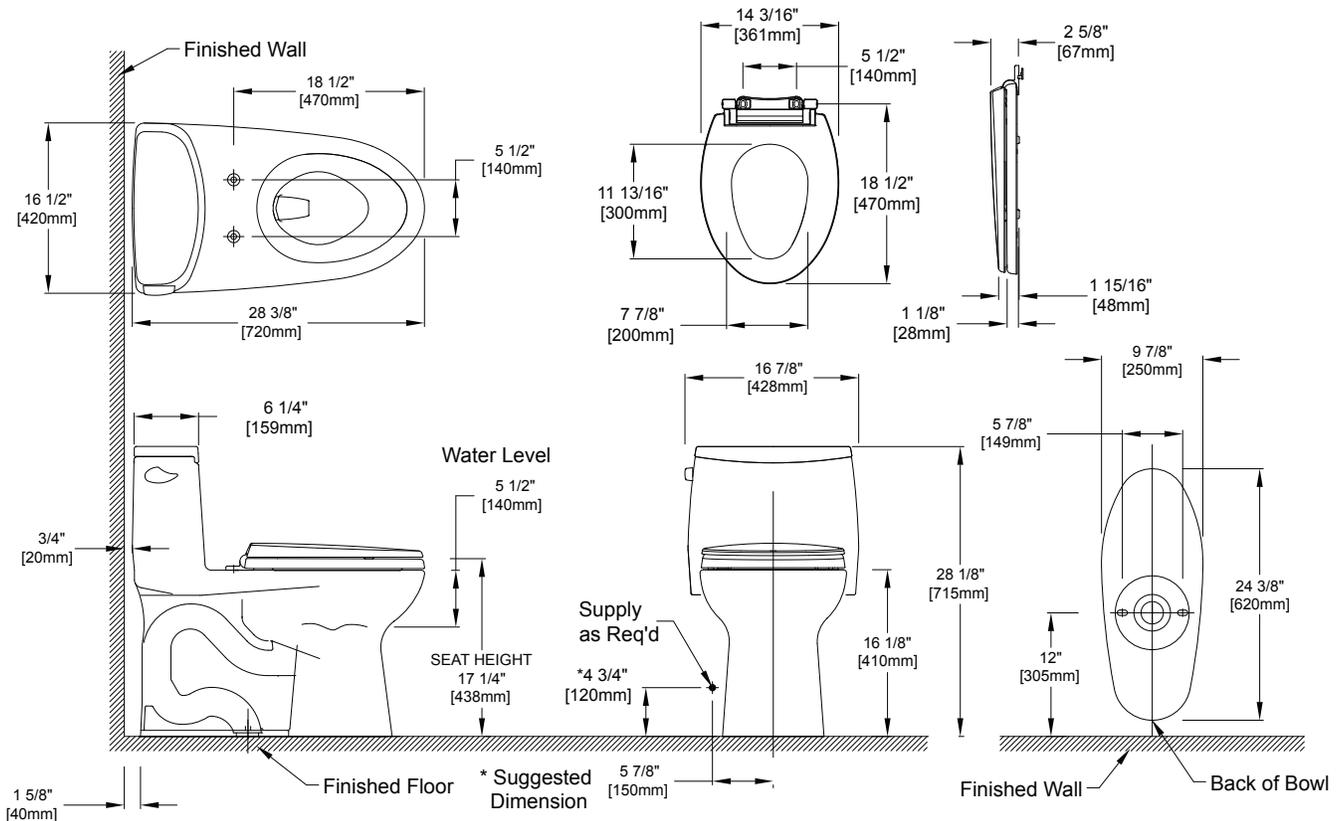

**TOTO®**

These dimensions and specifications are subject to change without notice