



# Harken® | K-22695

One-piece compact elongated toilet with skirted trapway, 1.28 gpf

## Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl
- Standard height
- 1.28 gpf (4.8 lpf)
- Left-hand Polished Chrome trip lever
- 2-1/8" (54 mm) glazed trapway
- Fully skirted trapway simplifies cleaning
- Quiet-Close™ elongated lid and seat prevents slamming



## Sustainability



## Available Colors/Finishes

*Color tiles intended for reference only.*

0 White



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
8-09-2026 09:01 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

*Accessibility standards may require controls to be located on the open side of the toilet.*

*Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.*



ASME A112.19.2/CSA B45.1

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

## Warranty

*See website for detailed warranty information.*

KOHLER® Toilets and Seats Limited Warranty

## Technical Information

|                       |                                     |
|-----------------------|-------------------------------------|
| Rough-in:             | Standard 12" (305mm)                |
| Flush Type:           | Class Five                          |
| Flush Rate:           | 1.28 gpf (4.8 lpf)                  |
| Bowl Shape:           | Elongated                           |
| Seat-Mounting Holes:  | 5-1/2" (140 mm)                     |
| Waste Outlet:         | Floor                               |
| Trapway Size:         | 2" (51 mm)                          |
| Trapway Type:         | Skirted                             |
| Water Surface Size:   | 7-13/16" x 5-1/8" (198 mm x 130 mm) |
| Rim to Water Surface: | 5-15/16" (151 mm)                   |

## Pressure/Fixture Supply Requirements

|                           |                    |
|---------------------------|--------------------|
| Minimum Flowing Pressure: | 15 psi (103.4 kPa) |
| Minimum Flow Rate:        | 1 gpm (3.8 l/min)  |

## Recommended Products/Accessories

1362736 Mounting Plate Kit Exposed Wire

K-20110 Quiet-Close™ elongated toilet seat

K-38578 Left-hand trip lever




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

8-09-2026 09:01 - US-CA

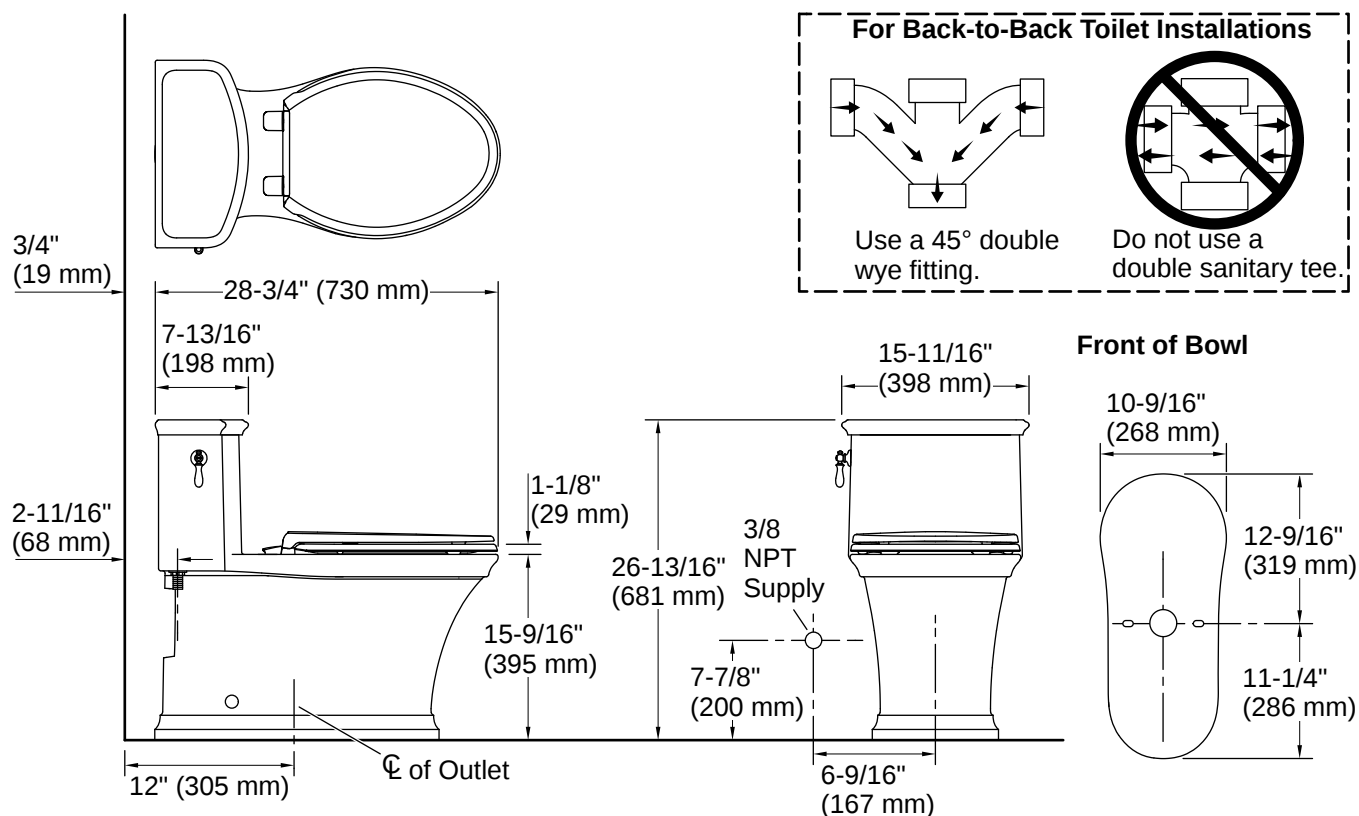

## Installation

- Standard 12" (305 mm) rough-in
- Supply line sold separately
- Requires mounting plate for heated seat installation (sold separately)

## Installation Notes

*Install this product according to the installation instructions.*

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
8-09-2026 09:01 - US-CA

THE BOLD LOOK  
OF **KOHLER**